

Constant Flow Sampler QB1





Constant Flow Sampler QB1

Description

QB1 is a family of portable constant flow samplers designed to be used in every air sampling application requesting from low to mid-flow capabilities.

The QB1 has been developed to satisfy the every day job of technicians; it's easy to use, rugged and reliable thanks to the built-in protections for particulate matter and liquids, which are the main responsables for damages to the pump and dry gas meter.

A humidity sensor display in real time the rH% of the sampled gases, allowing the operator to stop the sampling if conditions become criticals for the instrument or exceeding the specifications of the method.

More protection means less service and more availability of the instrument.

All the versions are capable of automatic pressure drop compensation, granting high flow constance, even fort long-term operations.

The QB1 are equipped with Dry Gas Meter, high precision flowmeter and thermometer for volume normalization, as requested by the standards

The pneumatic circuit has been designed to eliminate flow pulsations due to the use of diaphragm pumps.



Main Characteristics

- Constant flow sampler with automatic pressure drop compensation
- Wide application range, from stack emission to occupational hygiene.
- Features "leak free" diaphragm pumps, resistant to aggressive compounds.
- Protection filter against accidental suction of particulate matter and liquids.
- rH% measure on the sampled flow
- Meets and exceed the requirements of the standard UNI EN 12919 related to ambient samplers and for the stackj emission methods ISO EN 9096, EN 14385 and EN 13649.
- Compact, ergonomic, rugged design combined with low weights.

Rugged design and attention to details

QB1 are realized with high quality materials. The stainless steel structure make it unique on the market while the non-structural components are realized in light but robust aluminum alloy.


All the angles are rounded and the rubber borders make it safer to handle and transport.

Its construction allows to pile the instruments in order to save the space when stocking the instruments.

The internal components were selected and are assembled to grant longer life and operation in the most harsh conditions.

The control panel is protected by a transparent and resistant polycarbonate cover

The strong side handles, made in tecnopolymers, make it practical to move and lift even with a simple rope

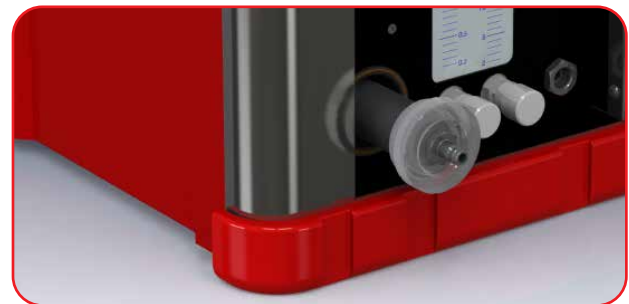

Precise and reliable

Every unit is tested carefully and the calibration is taken over with certified references with traceability to international standards.

Results of the tests are listed in the report coming with the instrument.

The combination of the flowmeter and dry gas meter satisfies the requests of the stack emission sampling standards.

The flowmeter has an expanded scale for a more accurate setting and regulation of the flowrate. The built-in relative humidity indication allows to increase the protection of the instrument, verifying, at the same time, the efficiency of the condensation unit. All the pumps models are leak free granted.

Perfect solution for side sampling

The QB1 version V2x5DC, is a 2-ways sampling solution. Each sampling line is equipped with flowmeter, dry gas meter, protection filter and, of course, a sampling pump.

Two separated timers allow to set different programs on the two lines.

The high compensation capability allows its use also in stack emission sampling with derived line, as requested by EN14385 for heavy metals or EN13211 for Mercury.

The performance curve of the adopted pump makes it perfect for gas sampling with tubes and impingers

Can be 220V powered by power supply or by built-in batteries.

Available models

QB1 V3.0

Pump :
Double head diaphragm pump
Nominal flowrate 55 l/min

Flowrate scales on flowmeters
0.2 ÷ 3 2 ÷ 30 NL/min

Weight
11 kgs

Power Supply
220Vac ± 10% 50/60Hz

Power
100 W

QB1 V1,5

Pump :
Single head diaphragm pump
Nominal flowrate 32 l/min

Flowrate scales on flowmeters
0.2 ÷ 3 2 ÷ 32 NL/min

Weight
9 kgs

Power Supply
220Vac ± 10% 50/60Hz

Power
50 W

QB1 V1,5DC

Pump :
Single head diaphragm pump
Nominal flowrate 30 l/min

Flowrate scales on flowmeters
0.2 ÷ 3 2 ÷ 30 NL/min

Weight
9,5

Power Supply
220Vac ± 10% 50/60Hz

Power
60 W

QB1 V2X5DC

Pump :
Two x single head diaphragm pump
Nominal flowrate 11 l/min

Flowrate scales on flowmeters
0.2 ÷ 5 NL/min (nº2)

Weight
13 kg with Batteries

Power Supply
220Vac ± 10% 50/60Hz
24 Vdc (1 Ah)

Built-in batteries
24 Vdc 2.3 Ah



QB1 V3.0



QB1 V2x5DC

Technical Characteristics

Sampled Gas Condition	Anhydrous, max temperature 45°C
Gas Inlet	With protection filter against solids and liquids
Connections	with quick connectors
Max ambient operative temperature	-10 ÷ 40°C 95% UR
Max stocking temperature	-10 ÷ 50°C 95% UR
Power Supply	220 Vac ±10% 50/60Hz 24 Vdc (per versioni DC)
Structure	Combined steel/aluminum
Dimensions	330 x 310 x 360 mm (L x P x H)
Digital Timer (*)	ON/OFF Setting Date and hour 1 min resolution Back up Lithium Battery Automatic restart in case of power failure Automatic/Manual Operation Mode

Sensors and measure specifications

Volume

Dry Gas Meter	class G1.6
Flowrate Range	0.016 m ³ /h - 2.5 m ³ /h
Accuracy	2% of the measure
Counter resolution	0.1 liters

Flow measurements

Rotameter	
Flow rate Range	See versions table
Accuracy	5% f.s.

DGM Temperature

Range	-50 - 70°C
Accuracy	± 1°C
Resolution	0.1°C

Sampled gas Humidity


Hygrometer	Range 10% - 99% rH
Accuracy	± 5%

Pressure Drop (excluded model V2x5DC)


Vacuum meter	Range 0 - 1 Bar
Accuracy	± 5%

(*) on request it's available the only ON/OFF version

External Dimensions (mm)

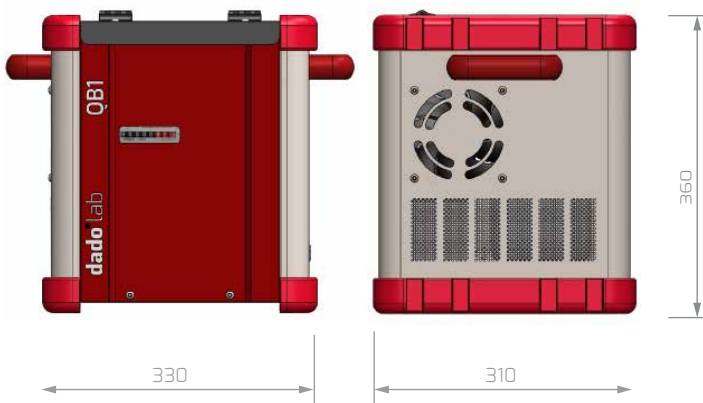

Pump characteristics

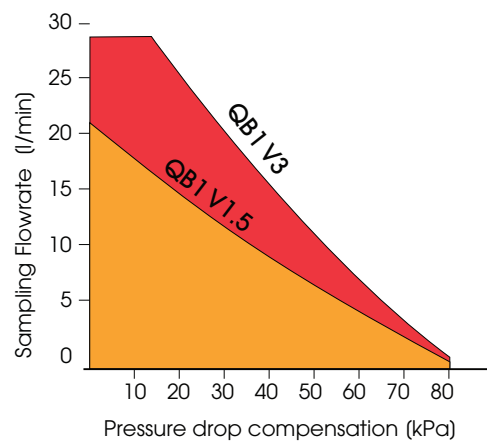

Models, accessories and spare parts



101 110 1001

QB1 V3.0 Standard Supply :

- 3 m³/h pump
- suction protection against solids and liquids
- Test and Certification report
- Quick connector
- Power cord
- User Manuals

101 110 1002

QB1 V1.5 Standard Supply :

- 1.8 m³/h pump
- suction protection against solids and liquids
- Test and Certification report
- Quick connector
- Power cord
- User Manuals



101 110 1003

QB1 V1.5DC Standard Supply :

- 1.8 m³/h 24Vdc Pump
- suction protection against solids and liquids
- 24Vdc input connector
- Test and Certification report
- Quick connector
- Power cord
- User Manuals

101 110 1005

QB1 V2x5DC Standard Supply :

- N^o 2 10 l/min pumps 24Vdc
- n^o2 dry gas meters
- protection filter
- built-in battery
- Test and Certification report
- Quick connector
- Power cord
- User Manuals



101 110 4004

QB1 Sampling Media Support :

Steel support stand for the 47mm filterholder and directly fixed on the QB1

Models, accessories and spare parts



101 110 4005

47 mm open filterholder:

Aluminum filterholder for 47mm with including cartridge for 47mm flat membranes.



101 110 4006

47mm filterholder spare cassette:

Made of Delrin® including steel support grid



101 110 2001

QB1 V1,5DC Battery Pack :

External battery pack 24V/12Ah for the QB1 V1,5DC. Duration of the power depends on the set flowrate. Weight 10kgs



101 101 3010

Gas Inlet Protection Filter

Pack of 10 filters



101 110 4001

Spare Dry Gas Meter

Supplied with test report on 2 points and assembling instructions



101 101 4002/3

Silica Gel/Charcoal Trap

- Available of 100 cc or 1 liter